


# Source One LX Thermostat S1-TBSU22HNS

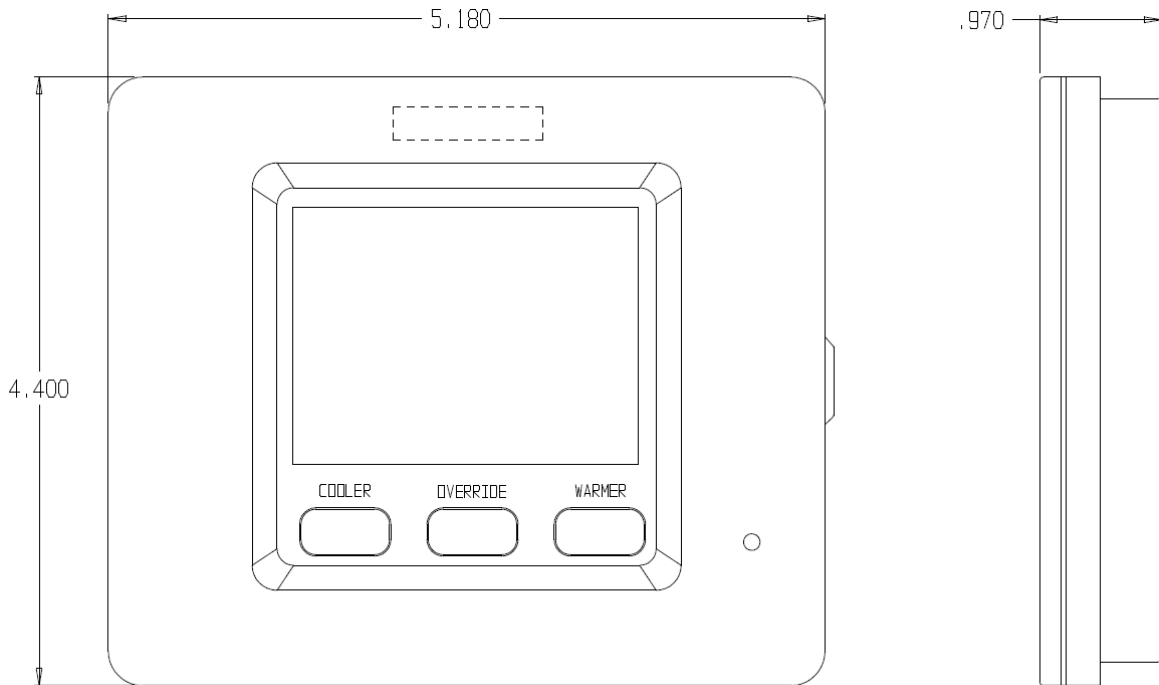

## **STANDARD FEATURES:**

- Non-programmable
- Up to 2-stages of heat, 2-stage cool for use with gas/electric, heat pump and electric HVAC equipment
- Customizable scrolling display can show dealers name and phone number for service alerts
- Scrolling display supports English, Spanish and French languages
- Diagnostic testing mode for technicians to exercise all outputs at installation
- Emergency Heat switch when set in heat pump mode
- LED light pipe display and backlit color coded keys
- All setpoints stored in non-volatile memory, and are never lost in power failure
- Service filter, service humidifier, service drain pan and service UV lamp indicators
- Outdoor sensor ready (wired or wireless)
- Control to, monitor or average 1 wired 10K ohm indoor remote sensors
- Built-in dehumidification control module
- 3 security levels with heat and cool setpoint limiting
- Override counter
- Smart Fan
- Dry contact equipped for energy management and building automation control
- Accepts optional Plug-In Communication module for wireless accessories (part number S1-LXRFM)
- Accepts optional Plug-In wireless indoor/outdoor remote sensor (part number S1-LXRFTS)
- Accepts optional Plug-In Comfort Call phone module (part number S1-LXCC)
- Accepts optional Plug-In USB Programmer (part number S1-LXPROG)
- Accepts optional lock cover (part number S1-LXLOCK)
- 5-year limited warranty

MODEL:	S1-TBSU22HNS	QUANTITY:		DATE:		
JOB NAME:						
LOCATION:						
BUYER:				BUYER P.O.#:		
ENGINEER:						